




Features

- 1/3 inch Sony Super HAD CCD
- Normal Resolution : 380 TV Lines
- Built-in IR LEDs (13EA) & Sensor
- Built in Fixed Lens (f=2.45mm, View Angle: 150°)
- Auto White Balance
- Min. Illumination : 0.00 Lux (IR LED On)
- Audio & Mirror Function On/Off
- IP67
- 12VDC

DIMENSIONS

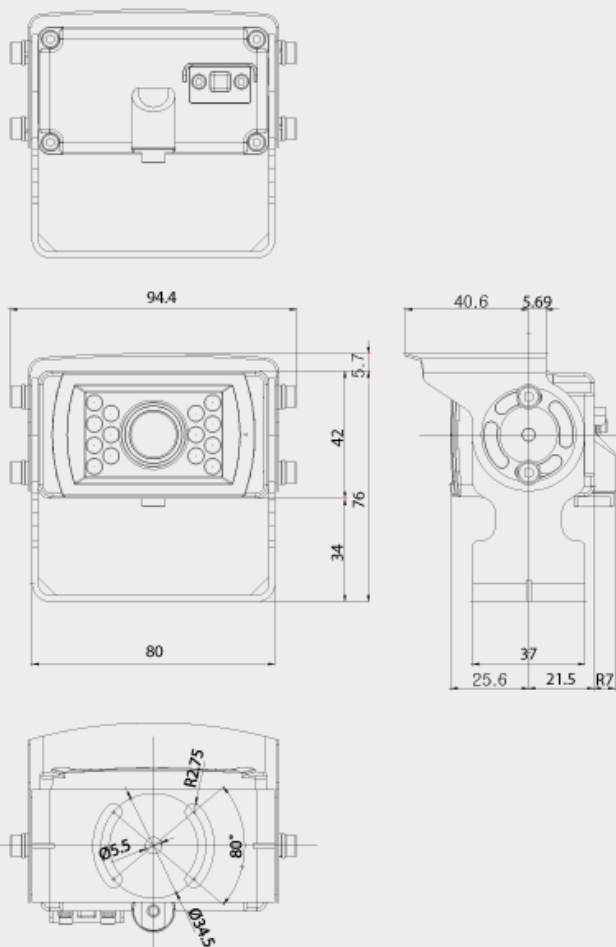

SPECIFICATIONS

Model	RV1750NIR	RV1750PIR
Signal System	NTSC	PAL
Scanning System	2:1 Interlace	
Scanning Frequency (H)	15.734 KHz	15.625 KHz
Scanning Frequency (V)	59.94 Hz	50 Hz
Image Sensor	1/3 Inch SONY Super HAD CCD	
Total Pixels	537 (H) x 505 (V) x 270K	537 (H) x 595 (V) x 320K
Effective Pixels	510 (H) x 492 (V) x 250K	500 (H) x 582 (V) x 290K
Horizontal Resolution	380 TV Lines	
Video Output	1.0V p-p (75Ω, Composite)	
Audio Output	2V p-p	
S/N Ratio	More than 48dB (AGC Off)	
Lens	Built-in Fixed Lens (f=2.45mm, View Angle: 150°)	
Min.Illumination	Day (0.3 Lux), Night (0.00 Lux, IR LED On)	
IR LED and Sensor	IR LED (850nm, 30°) 13EA, Sensor 1EA	
IR LED Visible Range	Max. 10m	
White Balance	Auto	
Mirror	On/Off	
Shutter Speed	1/60~1/100,000 Sec.	1/50~1/100,000sec.
Supplied Voltage	DC10V~15V (Recommendation DC12V±0.5V)	
Power Consumption	Max. 170mA/2W	
Dimensions(WxH)	94.4 x 76.0 mm	